

EQV-80-2
EQV-100-2
EQV-250-2



EQV-300-2



EQV-2000-2



EQV-2000-4

6 POLE 1200 VPM HEAVY DUTY ELECTRIC VIBRATORS

| Model | Centrifugal force | | 1 Phase | | | 3 phases | | | Dimensions mm / inches | | | | | | | | | | | Weight | |
|------------|-------------------|-------|-----------------|---------|------|--------------|--------------|--------------|------------------------|---------------|--------------|---------------|--------------|--------|-----|-----|--|--|--|--------|--|
| | LBS | N | Amperes at Volt | | | L mm inch | W mm inch | H mm inch | A mm inch | A2 mm inch | B mm inch | B2 mm inch | C mm inch | Figure | KG | LBS | | | | | |
| | | | 115/230 | 230/460 | 575v | | | | | | | | | | | | | | | | |
| EQV-500-6 | 500 | 2224 | 4.8/2.4 | 1.4/0.7 | 0.5 | 310 12.2 | 220 8.7 | 210 8.3 | 180 7 | NA | 110 4.3 | NA | 16 5/8 | 2 | 30 | 66 | | | | | |
| EQV-700-6 | 675 | 3002 | 5/2.5 | 1.4/0.7 | 0.6 | 310 12.2 | 220 8.7 | 210 8.3 | 180 7 | NA | 110 4.3 | NA | 16 5/8 | 2 | 30 | 66 | | | | | |
| EQV-1000-6 | 1100 | 4893 | ----- | 2.8/1.4 | 1.1 | 375 14.8 | 265 10.4 | 235 9 | 220 8.7 | NA | 140 5.5 | NA | 20 3/4 | 2 | 41 | 90 | | | | | |
| EQV-2000-6 | 2200 | 9876 | ----- | 5.4/2.7 | 2.5 | 440 17.3 | 320 12.6 | 290 11.5 | 260 10.2 | NA | 150 5.9 | NA | 24 1 | 2 | 76 | 167 | | | | | |
| EQV-3600-6 | 3600 | 16013 | ----- | 7.0/3.5 | 3.3 | 475 18.7 | 320 12.6 | 290 11.5 | 260 10.2 | NA | 150 5.9 | NA | 24 1 | 2 | 93 | 205 | | | | | |
| EQV-6000-6 | 6000 | 26689 | ----- | 9.2/4.6 | 3.8 | 530 20.9 | 430 17 | 380 15 | 310 13.8 | NA | 170 8.7 | NA | 36 1-1/2 | 2 | 180 | 396 | | | | | |
| EQV-9000-6 | 9000 | 40033 | ----- | 15/7.5 | 6.2 | 580 20.9 | 430 17 | 390 15 | 350 13.8 | NA | 220 8.7 | NA | 36 1-1/2 | 2 | 210 | 463 | | | | | |

EQV-600-4

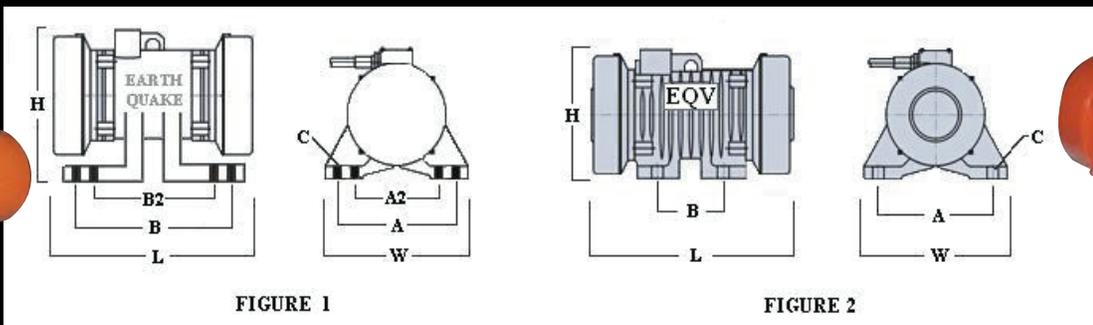


FIGURE 1

FIGURE 2

EQV-1000-2



EQV-1500-4
EQV-1100-4

8 POLE 900 VPM HEAVY DUTY ELECTRIC VIBRATORS

| Model | Centrifugal force | | 1 Phase | | | 3 phases | | | Dimensions mm / inches | | | | | | | | | | | Weight | |
|------------|-------------------|-------|-----------------|---------|------|--------------|--------------|--------------|------------------------|---------------|--------------|---------------|--------------|--------|-----|-----|--|--|--|--------|--|
| | LBS | N | Amperes at Volt | | | L mm inch | W mm inch | H mm inch | A mm inch | A2 mm inch | B mm inch | B2 mm inch | C mm inch | Figure | KG | LBS | | | | | |
| | | | 115/230 | 230/460 | 575v | | | | | | | | | | | | | | | | |
| EQV-350-8 | 350 | 1556 | 5/2.5 | 2/1 | 0.8 | 310 12.2 | 220 8.7 | 210 8.3 | 180 7 | NA | 110 4.3 | NA | 16 5/8 | 2 | 30 | 66 | | | | | |
| EQV-1125-8 | 1125 | 5004 | ----- | 3.8/1.5 | 1.2 | 440 17.3 | 320 12.6 | 290 11.5 | 260 10.2 | NA | 150 5.9 | NA | 24 1 | 2 | 80 | 176 | | | | | |
| EQV-2200-8 | 2200 | 9786 | ----- | 4.4/2.2 | 1.8 | 525 20.5 | 430 17 | 380 15 | 310 13.8 | NA | 170 8.7 | NA | 30 1-1/4 | 2 | 120 | 265 | | | | | |
| EQV-3400-8 | 3500 | 15568 | ----- | 6.8/3.4 | 2.7 | 525 20.5 | 430 17 | 380 15 | 310 13.8 | NA | 170 8.7 | NA | 30 1-1/4 | 2 | 140 | 308 | | | | | |
| EQV-5000-8 | 4500 | 20001 | ----- | 9.6/4.8 | 4 | 550 21.7 | 430 17 | 390 15 | 350 13.8 | NA | 220 8.7 | NA | 36 1-1/2 | 2 | 182 | 401 | | | | | |

N=Centrifugal Force in Newton

Note: Dimensions and data subject to change without notice.