

Earthquake!

VIBRATORS

FREE
2 WEEK
TRIAL



ASK ABOUT
LOWEST
PRICE
PROMISE!

TOP QUALITY FEATURES

ENGINEERED FOR ULTIMATE PERFORMANCE
EXCEPTIONAL POWER-TO-WEIGHT RATIO
EFFICIENT HIGH FREQUENCY VIBRATION
ADJUSTABLE FORCE
CONTINUOUS DUTY
LOW AIR CONSUMPTION
NO LUBRICATION REQUIRED
MAINTENANCE FREE

FREE
SILENCER




PNEUMATIC TURBINE VIBRATORS

Toll Free 866.269.5743 • www.earthquakeindustries.com

PERFORMANCE DATA

MODEL	FREQUENCY (VPM)			CENTRIFUGAL FORCE (LBS)			AIR CONSUMPTION (CFM)		
	30 PSI	60 PSI	90 PSI	30 PSI	60 PSI	90 PSI	30 PSI	60 PSI	90 PSI
XT - 75	13500	15500	17500	50	75	100	2.4	3.9	5
XT - 100	13000	14500	16000	70	100	145	2.5	4	5.5
XT - 150	8600	10500	11800	110	150	220	4.5	8	8.9
XT - 175	9000	11400	12000	125	175	250	4.9	8.4	10.2
XT - 200	4800	6900	7400	150	210	300	6.1	11.5	14.2
XT - 250	5000	7500	8000	140	250	425	6.5	12.1	16
XT - 300	NA	6000	6700	NA	405	600	NA	18.9	24
XT - 375	NA	7700	3900	NA	395	650	NA	19.5	26
XT - 400	NA	5800	9500	NA	808	1000	NA	26	34
XT - 450	NA	7500	9000	NA	849	1100	NA	27	36

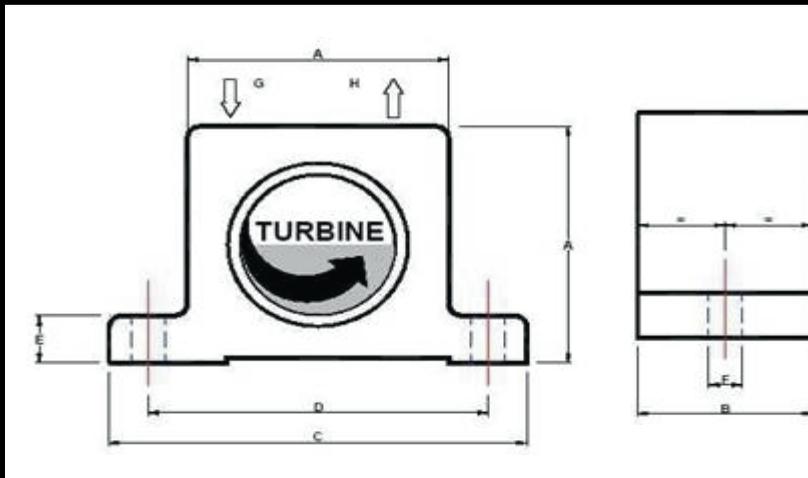

Earthquake Industries Inc. delivers the latest development in vibration technology.

Earthquake's XT Series Turbine Vibrators are engineered with an exceptional power-to-weight ratio. They operate quietly, with noise levels well below recommended government safety standards. This remarkable vibrator can work continuously without any lubrication and the force is completely adjustable.

Earthquake's XT Series Turbine Vibrators are the ideal solution for efficiently moving materials in bins, hoppers, and chutes.

Earthquake's "Lowest Price Promise" guarantees the most economical choice for the highest quality in vibration equipment.

DIMENSIONS (INCHES)

MODEL	A	B	C	D	E	F	G	H	WEIGHT LBS
XT - 75	1.97	1.30	3.38	3	0.47	0.27	1/8	1/8	0.55
XT - 100	1.97	1.30	3.38	3	0.47	0.27	1/8	1/8	0.56
XT - 150	2.56	1.65	4.45	4	0.63	0.35	1/8	1/4	1.24
XT - 175	2.56	1.65	4.45	4	0.63	0.35	1/8	1/4	1.28
XT - 200	3.15	2.20	5.00	4	0.63	0.35	1/4	3/8	2.40
XT - 250	3.15	2.20	5.00	4	0.63	0.35	1/4	3/8	2.46
XT - 300	3.94	2.87	6.30	5	0.79	0.43	3/8	3/8	4.85
XT - 375	3.94	2.87	6.30	5	0.79	0.43	3/8	3/8	5.10
XT - 400	4.72	3.26	7.63	6	0.94	0.66	3/8	3/8	8.13
XT - 450	4.72	3.26	7.63	6	0.94	0.66	3/8	3/8	8.57

NOTE: Dimensions and data subject to change without notice

ALSO AVAILABLE FROM EARTHQUAKE INDUSTRIES INC.



*Pneumatic Piston
Vibrators*



*Heavy Duty Electric
Vibrators*

*Mini Electric
Vibrators*

